


HUSAR WINCH BST 10000 LBS

BST 10000lbs	Technical specifications
Pull capacity(single line)	10000lbs / 4536 kgs
Motor 12V	5.5 hp / 4,0 kw
Controls	Wired / wireless remote control
Gear	3-stage planetary
Gear ratio	218:1
Brake	Automatic
Rope	28m x Ø 8,5 mm
Fairlead	4-ways rollers fairlead
Net weight	35 kg
Mounting bolt pattern	254mm x 114,3mm
Dimensions	(L x W x H) 546mm x 160mm x 218mm

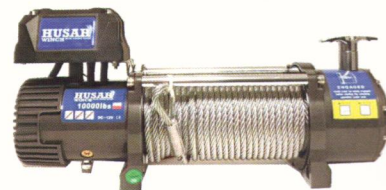


Line speed and motor current (first layer)						
Line pull	Lbs	0	2000	6000	8000	10000
	Kgs	0	907	2722	3629	4536
Line speed	M/min	6,8	4,88	2,98	2,44	1,8
Motor current	Amps	80	130	230	290	350

Line pull and cable capacity					
Layer of cable		1	2	3	4
Rated line pull per layer	Lbs	10000	8800	7800	6600
	Kgs	4535	3990	3538	2994
Cable capacity per layer	M	6	13,2	22	28

BST 12000lbs	Technical specifications
Pull capacity(single line)	12000lbs / 5443 kgs
Motor 12V	6.0 KM / 4,4 kw
Controls	Wired / wireless remote control
Gear	3-stage planetary
Gear ratio	265:1
Brake	Automatic
Rope	25m x Ø 9,5 mm
Fairlead	4-ways rollers fairlead
Net weight	38 kg
Mounting bolt pattern	254mm x 114,3mm
Dimensions	(L x W x H) 546mm x 160mm x 218mm

HUSAR WINCH BST 12000 LBS

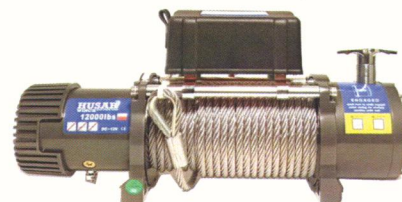

Line speed and motor current (first layer)						
Line pull	Lbs	0	4000	6000	10000	12000
	Kgs	0	1814	2722	4536	5443
Line speed	M/min 12V	6,8	3,8	3	2,1	1,7
	M/min 24V	10	7	5,5	3,2	2,7
Motor current	Amps 12V	80	170	210	310	360
	Amps 24V	45	70	95	185	240

Line pull and cable capacity					
Layer of cable		1	2	3	4
Rated line pull per layer	Lbs	12000	9900	8300	7000
	Kgs	5443	4490	3765	3175
Cable capacity per layer	M	6	13	22	25