


HUSAR

WINCH

BETTER STRONGER TOUGHER

HUSAR WINCH BST S 20000 LBS

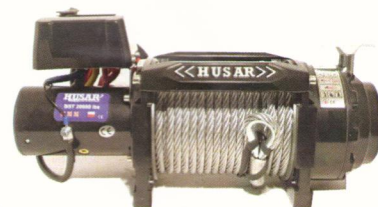

BST S 20000lbs	Technical specifications
Pull capacity(single line)	20000 lbs (9072 kgs)
Motor	24V 6.0kW / 7.9hp
Controls	Wired / wireless remote control
Gear	3-stage planetary
Gear ratio	450:1
Brake	Automatic
Rope	26,5m x Ø 12 mm
Fairlead	4-ways rollers fairlead
Net weight	61 kg
Mounting bolt pattern	254mm×114.3mm
Dimensions	(L x W x H) 620mm × 214mm × 290mm

Line speed and motor current (first layer)						
Line pull	Lbs	0	12500	14000	17500	20000
	Kgs	0	5670	6350	7938	9072
Line speed	M/min 24V	4,4	1,6	1,4	1,2	1
Motor current	Amps 24V	40	180	200	250	265

Line pull and cable capacity					
Layer of cable		1	2	3	4
Rated line pull per layer	Lbs	20000	16160	13557	11677
	Kgs	9072	7330	6149	5297
Cable capacity per layer	M	6	13	21	25,5

HUSAR WINCH BST S 22000 LBS



BST S 22000lbs	Technical specifications
Pull capacity(single line)	22000 lbs (9979 kgs)
Motor 24V	6.1kW / 8.2 hp
Controls	Wired / wireless remote control
Gear	3-stage planetary
Gear ratio	370:1
Brake	Automatic
Rope	28,5m x Ø 12 mm
Fairlead	4-ways rollers fairlead
Net weight	73 kg
Mounting bolt pattern	254mm×114.3 mm 254mm×165.1mm
Dimensions	(L x W x H) 635mm × 214mm × 252mm

Line speed and motor current (first layer)						
Line pull	Lbs	0	10000	14000	17000	22000
	Kg	0	4536	6350	7711	9979
Line speed	M/min 24V	8,4	3,3	2,1	1,4	1,4
Motor current	Amper 24V	35	115	198	220	280

Line pull and cable capacity					
Layer of cable		1	2	3	4
Rated line pull per layer	Lbs	20000	17742	1465	1291
	Kg	9979	8048	6743	5802
Cable capacity per layer	m	5,6	12	20	28,5