


HUSAR

WINCH

BETTER STRONGER TOUGHER

HUSAR WINCH BST S 3500 LBS

BST S 3500lbs	Technical specifications
Pull capacity(single line)	3500lbs / 1587 kgs
Motor 12V	1.5 KM / 1,0 kw
Controls	Wired / wireless remote control
Gear ratio	198:1
Brake	Automatic
Rope	12m Ø 5,5 mm
Fairlead	4-ways rollers fairlead
Net weight	8kg
Mounting bolt pattern	124mm x 76mm
Dimensions	(L x W x H) 334mm x 114mm x 120mm

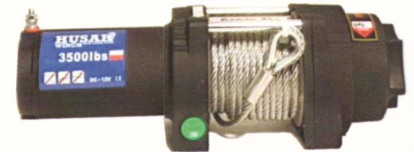

Line speed and motor current (first layer)						
Line pull	Lbs	0	1000	2000	3000	3500
	Kgs	0	454	907	1360	1589
Line speed	M/min	4,9	3,2	2,8	2,2	1,8
Motor current	Amps	15	70	105	135	150

Line pull and cable capacity					
Layer of cable		1	2	3	4
Rated line pull per layer	Lbs	3500	2870	2430	2100
	Kgs	1598	1300	1100	950
Cable capacity per layer	M	2,1	4,6	7,6	12

HUSAR WINCH BST S 4500 LBS

BST S 4500lbs	Technical specifications
Pull capacity(single line)	4500lbs / 2041 kg
Motor 12V	1,8 KM / 1,3 kW
Controls	Wired / wireless remote control
Gear ratio	198:1
Brake	Automatic
Rope	15 m Ø 6,3 mm
Fairlead	4-ways rollers fairlead
Net weight	11 kg
Mounting bolt pattern	124mmx76mm
Dimensions	(L x W x H) 391mm x 114mm x 120mm



Line speed and motor current (first layer)						
Line pull	Lbs	0	1000	2000	3000	4500
	Kg	0	454	907	1360	2041
Line speed	M/min	4,9	3,2	2,8	2,2	1,5
Motor current	Amper	17	70	105	135	210

Line pull and cable capacity					
Layer of cable		1	2	3	4
Rated line pull per layer	Lbs	4500	3841	3310	2907
	Kgs	2041	1742	1501	1119
Cable capacity per layer	m	2	4,3	7,2	12