


HUSAR

WINCH

BETTER STRONGER TOUGHER

HUSAR WINCH BST 5500LBS

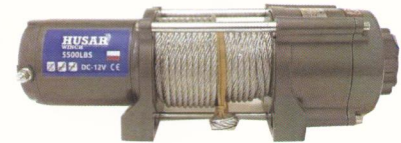

BST 5500lbs	Technical specifications
Pull capacity(single line)	5500lbs / 2495 kg
Motor 12V	2.5 KM / 3,4 kW
Controls	Wired / wireless remote control
Gear ratio	166:1
Brake	Automatic
Rope	14,5 m Ø 6 mm
Fairlead	4-ways rollers fairlead
Net weight	15,5 kg
Mounting bolt pattern	168mm x 76,2mm
Dimensions	(L x W x H) 408mm x 125mm x 123mm

Line speed and motor current (first layer)						
Line pull	Lbs	0	2000	3000	4500	5500
	Kgs	0	1523	1750	2057	2495
Line speed	M/min	3,9	2,6	2,1	1,4	1,1
Motor current	Amps	28	120	160	220	280

Line pull and cable capacity					
Layer of cable		1	2	3	4
Rated line pull per layer	Lbs	5500	4535	3858	3357
	Kgs	2495	2057	1750	1523
Cable capacity per layer	M	3,7	8	12,8	14,5

HUSAR WINCH BST 8500 LB



BST 8500lbs	Technical specifications
Pull capacity(single line)	8500lbs / 3856 kgs
Motor 12V	5.5 hp
Controls	Wired / wireless remote control
Gear	3-stage planetary
Gear ratio	218:1
Brake	Automatic
Rope	24m
Fairlead	4-ways rollers fairlead
Net weight	32 kg
Mounting bolt pattern	186mm x 114,3mm
Dimensions	(L x W x H) 430 X 160 X 218mm

Line speed and motor current (first layer)						
Line pull	Lbs	0	2000	4000	6000	8500
	Kgs	0	907	1814	2722	3855
Line speed	M/min	7,8	4,88	3,69	2,98	2,44
Motor current	Amps	80	130	180	230	290

Line pull and cable capacity					
Layer of cable		1	2	3	4
Rated line pull per layer	Lbs	8500	6640	5600	4800
	Kgs	3855	3012	2540	2177
Cable capacity per layer	M	6	13,2	22	28